

VIDEO DISPLAYS



Stadium Sound System 400 -- 4-Speaker, 1200 Watt Audio


- Weather-resistant three-way horn loaded triaxial speakers
- 60°-90° X 40° coverage
- Fiberglass housing with powder-coated steel grill
- Sensitivity: 104 dB SPL (80 Hz to 16 kHz 1/3 octave bands)
- Recommended Power Amplifier: 830W to 1200W @ 4 ohms
- Maximum Output: 130 dB SPL / 137 dB SPL (peak)
- Nominal Impedance: 4 ohms
- Custom grill with artwork applied



Other speaker configurations are available.

Video Specifications

LED Lifetime: 100,000 plus hours
 Colors: Full Spectrum
 LED Shape: Oval
 Dimming: Automatic Photocell/Manual
 Communication: Ethernet, Fiber Optic Cable or RF wireless
 Software: DesignXpress

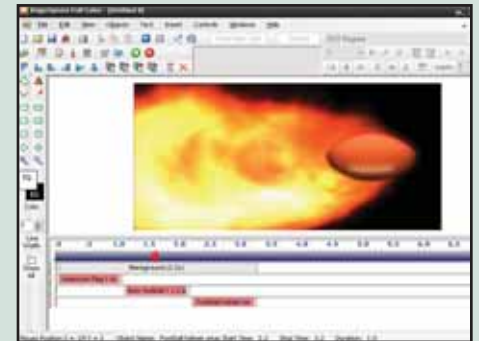

Our easy to use software includes a library of animation files that will add sizzle to your video productions.



Import your own pictures and add text to build a team roster for instant display during the game.

Outdoor 20mm Full-Color LED Video Displays - 16:9 Ratio

Model#	Matrix	Cabinet Dimension	Weight	Power
V2005	80 x 144	5 ft. 10 in. x 9 ft. 9 in.	565 lbs	120 VAC, 36 Amps
V2006	96 x 176	6 ft. 10 in. x 11 ft. 10 in.	800 lbs	120 VAC, 52 Amps
V2007	112 x 208	7 ft. 11 in. x 14 ft.	1,120 lbs	120 VAC, 72 Amps
V2008	128 x 240	8 ft. 11 in. x 16 ft. 1 in.	1,440 lbs	120 VAC, 95 Amps
V2009	144 x 256	10 ft. x 17 ft. 1 in.	1,700 lbs	120 VAC, 114 Amps
V2010	160 x 288	11 ft. 1 in. x 19 ft. 3 in.	2,120 lbs	120 VAC, 142 Amps
V2011	176 x 320	12 ft. 1 in. x 21 ft. 4 in.	2,920 lbs	120 VAC, 173 Amps
V2012	192 x 352	13 ft. 2 in. x 23 ft. 5 in.	3,115 lbs	120 VAC, 208 Amps

